



MODEL : P25A-D

Application	For gases and low viscosity liquids up to 80 °C.
Pressure range	-1 bar upto 600 bar
Accuracy	+/-1.6% as per UNI 8293
Ambient temperature	-25/+65 °C
Process temperature	max. +80 °C
Working pressure	max. 75% of the full scale valve
Protection	IP65 as per IEC529
Elastic element	Phosphor Bronze Bourdon
Connection	Brass
Case	AISI 304 st.st.
Window	Acrylic glass
Dial	ABS , white with black markings
Safety option	Blow out vent

<i>Dial size</i>	<i>2.5 inches</i>
<i>Connection type</i>	<i>Bottom</i>
<i>Connection size</i>	<i>1/4 inches</i>

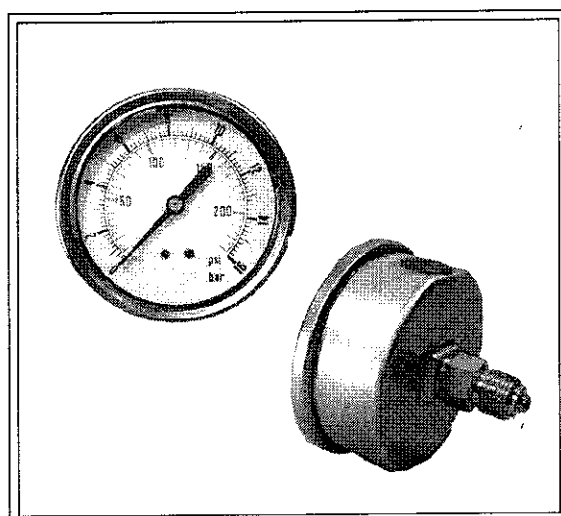

MODEL : P25D-D

Application	For gases and low viscosity liquids up to 80 °C.
Pressure range	-1 bar upto 600 bar
Accuracy	+/-1.6% as per UNI 8293
Ambient temperature	-25/+65 °C
Process temperature	max. +80 °C
Working pressure	max. 75% of the full scale valve
Protection	IP65 as per IEC529
Elastic element	Phosphor Bronze Bourdon
Connection	Brass
Case	AISI 304 st.st.
Window	Acrylic glass
Dial	ABS , white with black markings
Safety option	Blow out vent

<i>Dial size</i>	<i>2.5 inches</i>
<i>Connection type</i>	<i>Center Back</i>
<i>Connection size</i>	<i>1/4 inches</i>