



NF

MODEL : P25A-D

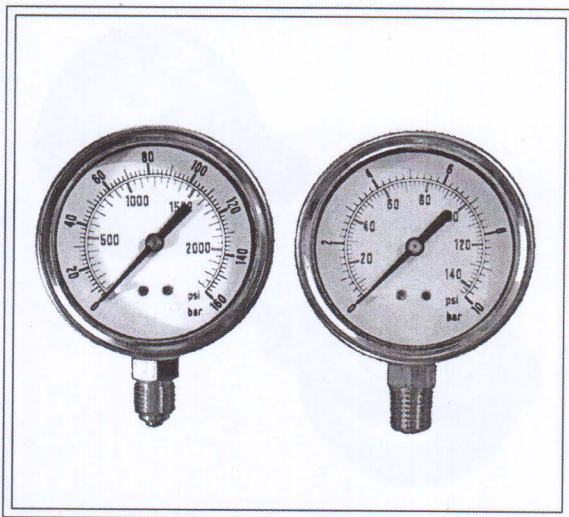

Application	For gases and low viscosity liquids up to 80 °C.
Pressure range	-1 bar upto 600 bar
Accuracy	+/-1.6% as per UNI 8293
Ambient temperature	-25/+65 °C
Process temperature	max. +80 °C
Working pressure	max. 75% of the full scale valve
Protection	IP65 as per IEC529
Elastic element	Phosphor Bronze Bourdon
Connection	Brass
Case	AISI 304 st.st.
Window	Acrylic glass
Dial	ABS , white with black markings
Safety option	Blow out vent

Dial size	2.5 inches
Connection type	Bottom
Connection size	1/4 inches



MODEL : P25D-D